
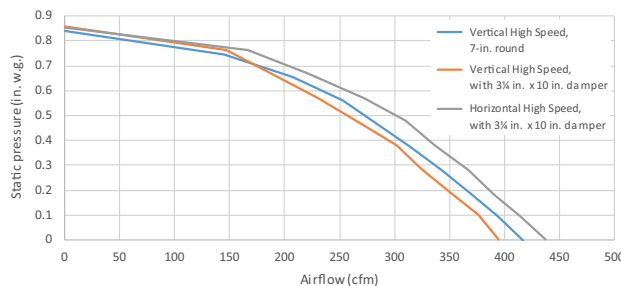


NuTone brings you a bold new shape in a pro-style hood. The combination of high performance blower, deep canopy design and hybrid baffle filtration will satisfy even the most demanding cooks.

SIZE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30 in.	NPDP130SS	HPFA424 (Type B5)	HPF24 (Type Xb)

PERFORMANCE						
Duct Orientation	Size	Damper	Sones		CFM	
			Normal	High	Normal	High
Vertical - Rectangular	3¼ in. x 10 in.	Included	0.5	6.0	150	390
Horizontal - Rectangular	3¼ in. x 10 in.	Included	0.6	5.5	150	400
Round - Vertical	7 in.	Sold Separately	0.4	5.5	150	390

FEATURES	
Control type	2-speed Deluxe Rocker
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
ADA Capable	yes
Lighting	1-level LED (included)
Grease Filters	Hybrid/Baffle (Qty. 2)
Installation Hardware	EZ1 brackets
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately
AC INPUT	
120 V, 60 Hz - 1.4 AMPS	
OPTIONAL ACCESSORIES	
7-in. Round Damper	BP87Q
ADA wiring kit	HAWRK3
Make-up Air Dampers	MD6TU, MD8TU and MD10TU
MOUNTING HEIGHT	
18 in. to 30 in. from cooktop to bottom of hood	
LIMITED WARRANTY	
1-year	
3-year (LED modules only)	
See installation manual for full warranty text.	
FOR INDOOR USE ONLY	

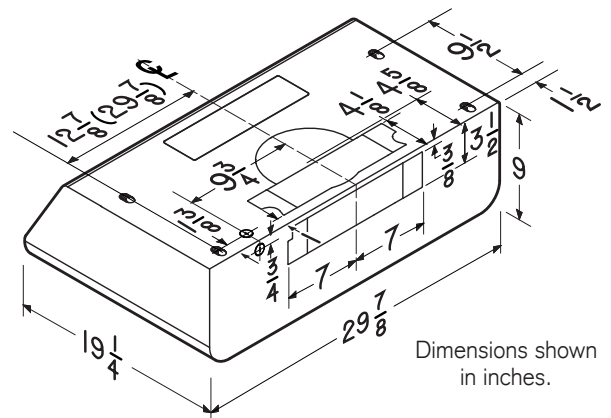

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

99045800E

NuTone vous présente une nouvelle hotte aux formes remarquables, de style professionnel. Alliant un ventilateur à haute performance, un boîtier de conception profonde et une filtration à déflecteur hybride, elle satisfera même les cuisiniers les plus exigeants.

LARGEUR	INOX	FILTRES À GRAISSES (remplacement)	FILTRES DE RECIRCULATION
30 po	NPDP130SS	HPFA424 (Type B5)	HPF24 (Type Xb)

RENDEMENT						
Orientation du conduit	Largeur	Volet	Sones		pi <sup>3</sup> /min	
			Normale	Haute	Normale	Haute
Rectangulaire vertical	3¼ po x 10 po	inclus	0,5	6,0	150	390
Rectangulaire horizontal	3¼ po x 10 po	inclus	0,6	5,5	150	400
Rond vertical	7 po	vendu séparément	0,4	5,5	150	390

CARACTÉRISTIQUES	
Type de commande	à bascule de luxe, 2 vitesses
Arrêt différé	non
Rappel d'entretien des filtres	non
Détecteur Heat Sentry <sup>MC</sup>	non
Capacité ADA	oui
Éclairage	DEL à 1 intensité (inclus)
Filtres à graisses	Hybrides / à déflecteurs (qté 2)
Matériel pour l'installation	Supports EZ1
ENERGY STAR®	non
Recirculation	Filtres de recirculation vendus séparément

#### ALIMENTATION CA

120 V, 60 Hz - 1,4 A

#### ACCESSOIRES OPTIONNELS

Volet rond de 7 po	BP87Q
Ensemble de câblage ADA	HAWRK3
Dispositifs d'apport d'air	MD6TU, MD8TU et MD10TU

#### HAUTEUR DE MONTAGE

De 18 po à 30 po au-dessus de la surface de cuisson

#### GARANTIE LIMITÉE

1 an  
3 ans (modules DEL seulement)  
*Voir le manuel d'installation pour le texte complet de la garantie.*

#### POUR UTILISATION À L'INTÉRIEUR SEULEMENT

