


# RDFU PREMIUM RADIATION DAMPER FOR VENTILATION FANS

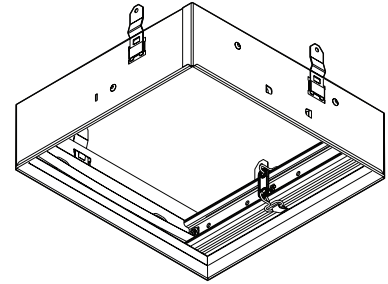

**Premium radiation damper for use with Broan and NuTone ventilation fans (sold separately).**

### FEATURES

- For use in 1, 2 and 3 hour rated floor-ceiling and roof-ceiling constructions
- Galvanized steel frame
- High temperature, non-asbestos, reinforced fiber thermal fabric
- Stainless steel closure springs
- 165°F fusible link
- Separate outer frame allows complete fan and damper serviceability without disturbing the surrounding ceiling material
- Meets or exceeds NFPA-90A
- UL Classified (UL-555C)


RDFU for use with the following ventilation fan models:

**Broan** QT130E, QT130LE\*, QT140E, QT140LE\*, QTXE150, QTXE150FLT\*, RB80, RB110, RB80L\*, RB80L1\*, RB110L\*, RB110L1\*, XB50, XB80, XB110, XB50L\*, XB80L\*, XB110L\*, XB110H\*, XB110HL\*, ZB80, ZB110, ZB80L\*, ZB110L\*, ZB110H\*, ZB110HL\*, ZB80M\*, ZB110M\*, ZB80ML\*, ZB110ML\*, XB50L1\*, XB80L1\*, XB110L1\*, XB110HL1\*, ZB80L1\*, ZB80ML1\*, ZB110L1\*, ZB110HL1\*, ZB110ML1\*

**NuTone** QTN130E, QTN130LE1\*, QTXEN150, QTXEN150FLT\*, RN80, RN110, RN80L\*, RN110L\*, XN50, XN80, XN110, XN50L\*, XN80L\*, XN110L\*, XN110H\*, XN110HL\*, ZN80, ZN110, ZN80L\*, ZN110L\*, ZN110H\*, ZN110HL\*, ZN80M\*, ZN110M\*, ZN80ML\*, ZN110ML\*

- \* Sensor and light cable extensions required on these models.
- Purchase Model RDJUMPU separately for fans with incandescent or fluorescent lights
  - Purchase Model RDJUMPU1 separately for fans with LED lights

Radiation damper shall be rated for use in up to three hour ceiling constructions. It shall be UL Classified (UL-555C) and meets or exceeds NFPA-90A.

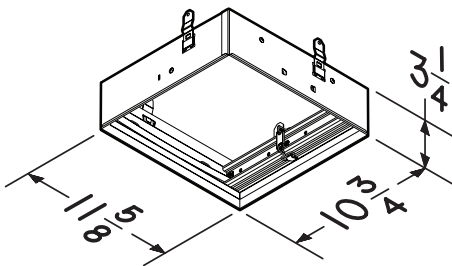

SEE DETAILS ON  
UL CLASSIFICATION  
MARKING ON PRODUCT

Broan-NuTone LLC Hartford, Wisconsin www.broan.com www.nutone.com 800-558-1711  
Broan-NuTone Canada Mississauga, Ontario www.broan.ca www.nutone.ca 877-896-1119

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date